

400-8876-858
www.chinajack.com



Jack Wechat



Jack Facebook

2023.04

杰克科技股份有限公司
浙江省台州市椒江区东海大道东段1008号
电话 :0086-576-88177788 88177789
传真 :0086-576-88177758

JACK TECHNOLOGY CO., LTD
No.1008, Donghai Road East, Jiaojiang District,
Taizhou city, Zhejiang, China
TEL:0086-576-88177788 88177789
FAX:0086-576-88177758




**Rotary hook pattern machine without
taking off the thread**
bottom thread prevention,no taking off the thread




JK-T3520MA-D

JK-T3520MA-D


Rotary hook pattern machine without taking off the thread
bottom thread prevention,no taking off the thread

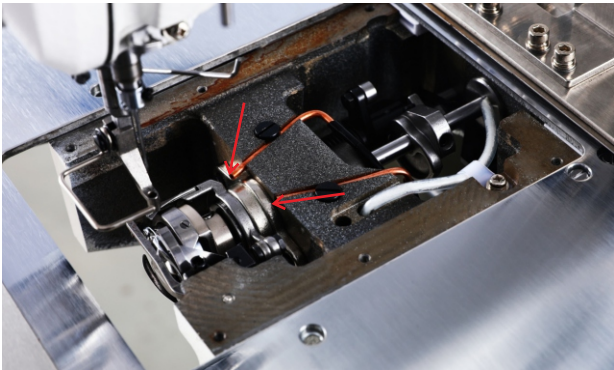

1 Prevent off-thread,sew stability
Intelligent air blowing device prevents the seam from being off- thread; Reduce hook wear, improve sewing performance, and reduce thread breakage frequency.

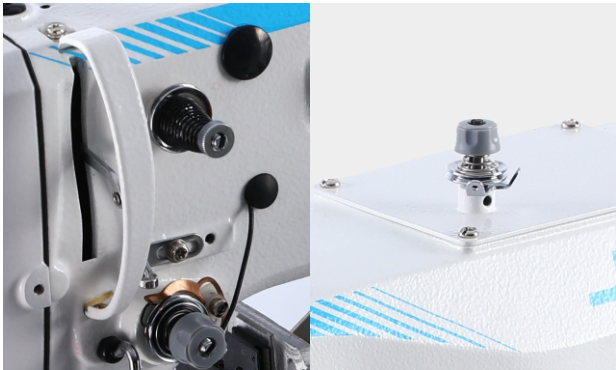


2 Thread-breaking detection, high-quality wire passing parts
Emergency stop when the thread breaks, the machine will stop immediately if the thread breaks; avoiding waste and rework.

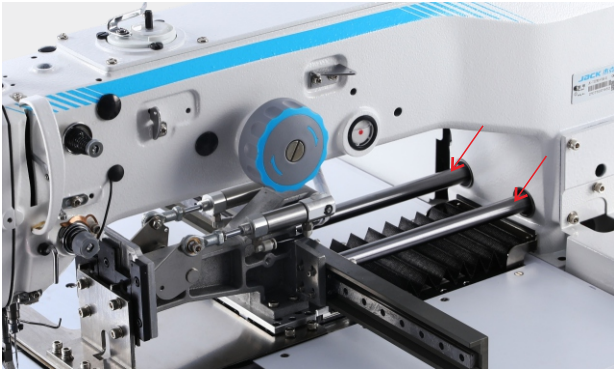


3 Prevent off-thread,sew stability
Lifting the feeding pressure frame during the front, rear, left and right sewing process, the pressure of the pressure plate is evenly distributed; Prevent the material from loosening to ensure sewing stability.



4 High-precision Supper wide feeding track
The standard width of X and Y guide rails is 15mm (3mm wider than most competing products); Especially for the sewing of extremely thick materials, the feeding is more stable and the feeding accuracy is higher.

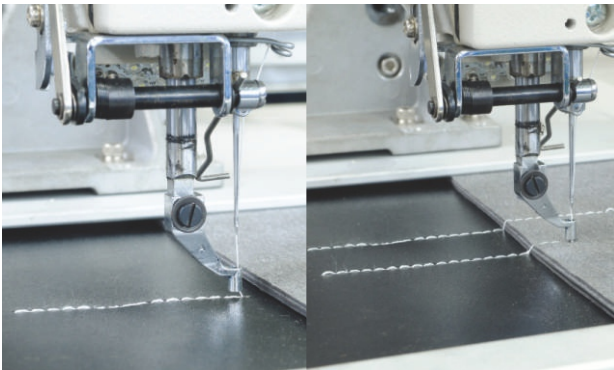


5 Smart middle presser foot, perfect sewing
The height of the electronic intermediate presser foot can be set according to the thickness of the fabric. The “N” model does not have an electronic middle presser foot;Prevent skipped stitches from breaking and prevent damage to sewing garments.

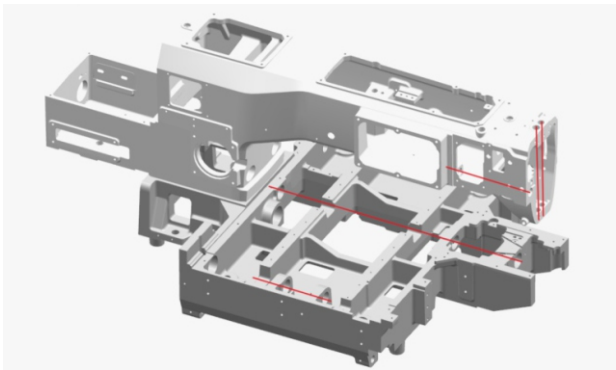


6 High-precision shell and parts
Japanese high quality machine tool and Jack's new one-piece reaming process create high-quality casings; multi-layer spray painting process paves the way, and the painted parts do not change color for a long time.




7 Pattern editing and input, convenient and quick
Up to 999 patterns can be imported via USB, which can be easily edited through the computer, and can also be made through the operation screen.

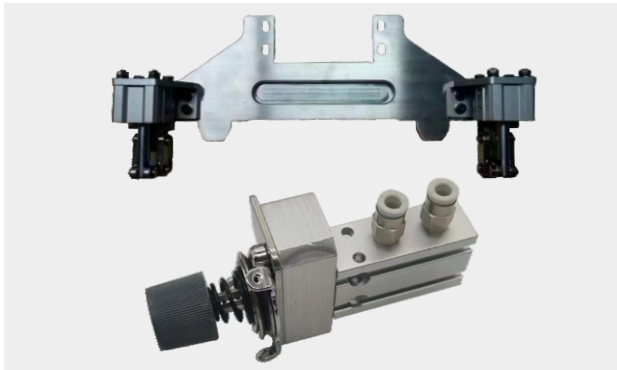

8 Additional device easy to choose and match
For processes such as frequent replacement of templates for small shoes, a clip device is provided to improve sewing efficiency and product quality.

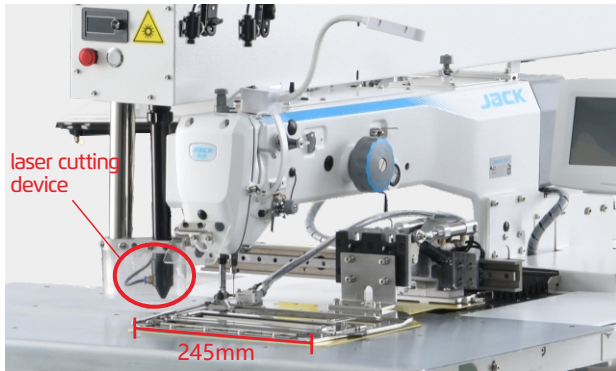

9laser pocket opening machine
The cutting range reaches 245mm×200mm

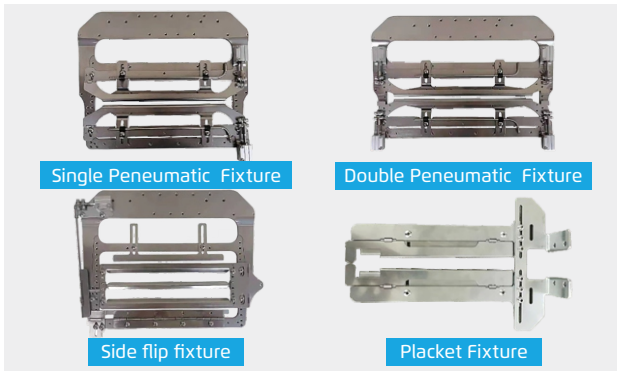

10 Rich selection of fixtures
Avariety of different fixtures can be selected to meet various process needs.

Specification

Model	Type	Sewing area (mm)	Neeedle	Neeedle thread No.	Thread No.	Needle gauge (mm)	Middle presser foot walking distance (mm)	Flip presser foot height (mm)	Max speed (R. p. m)	volume (mm)	weight (kg)
JK-T3520MA-D	Rotary hook	350X200	Dpx17 19#	1	2	0.1-12.7	17	26	2500	1200x1220x1320	180/200
JK-T3520MA-N-D	Rotary hook	350X200	Dpx17 19#	1	2	0.1-12.7	17	26	2500	1200x1220x1320	180/200
JK-T3520MA-N-F31G1-DII	Rotary hook	350X200	Dpx17 19#	1	2	0.1-12.7	17	/	2500	1800x1500x1400	260/290
JK-T3520MA-N-F31G2-DII	Rotary hook	350X200	Dpx17 19#	1	2	0.1-12.7	17	/	2500	1800x1500x1400	260/290
JK-T3520MA-F1-D	Rotary hook	350X200	Dpx17 19#	1	2	0.1-12.7	17	26	2500	1200x1220x1320	180/200
JK-T3520MA-N-F1-D	Rotary hook	350X200	Dpx17 19#	1	2	0.1-12.7	17	26	2500	1200x1220x1320	180/200
JK-T3520MA-F4-D	Rotary hook	350X200	Dpx17 19#	1	2	0.1-12.7	17	10	2500	1200x1220x1320	180/200
JK-T3520MA-N-F4-D	Rotary hook	350X200	Dpx17 19#	1	2	0.1-12.7	17	10	2500	1200x1220x1320	180/200

Default——electronic middle presser foot,Optional ——“N” model has a Pneumatic middle presser foot
F1: Flip presser foot, F4: side sliding presser foot, F31: laser device, G1: Manual Fixture, G2: Pneumatic Fixture.