

JACK

China No.1



Automatic Pocket Welting Machine



JK-T5878-68



Jack Wechat



Jack Sewing
Machine Co.,Ltd.

JACK SEWING MACHINE CO.,LTD.

No. 15 Airport South Road, Jiaojiang District, Taizhou, Zhejiang, PRC
TEL: 0086-576-88177782 88177767
FAX: 0086-576-88177787

E-mail: sales@chinajack.com
www.chinajack.com


JK-T5878-68

Efficiency Comparison

- Production capacity increase **700%**.
- **7 sets** lockstitch machine, space, labor and management cost saving per year
- Quality improvement **10-15%**



Advantage

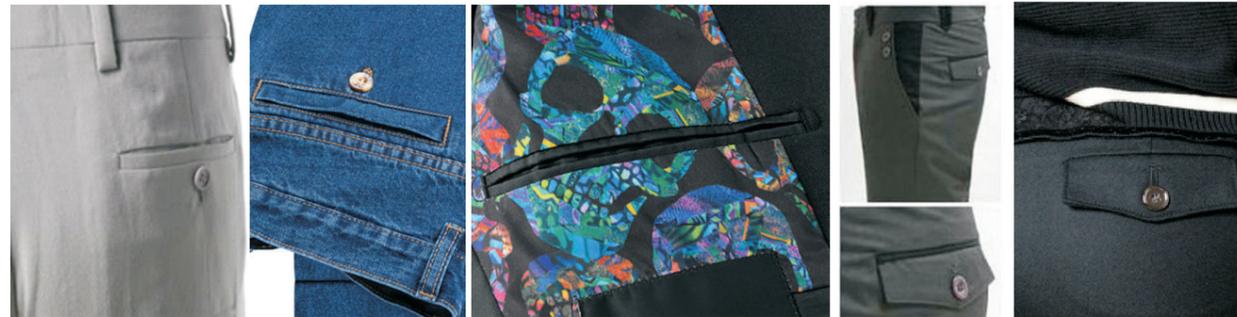

single welt pocket

double welt pocket

double welt pocket with flap

1 More Options, Higher Efficient

Capable for variety of pocket welting patterns such as single welt pocket, double welt pocket, double welt pocket with and without flap, etc., output up to 2000/8 hours.




2 Smart Touchable Panel, Intuitive Operation

Large size smart touchable panel makes operation more intuitive and smoothly. USB port for pattern storage and program updates. Internal SD card supports video playing.




3 Big Presser Foot Adjustment, Wider Application

Adjustment button can control the movement of the big presser foot, more widely application for fabrics with different thickness.

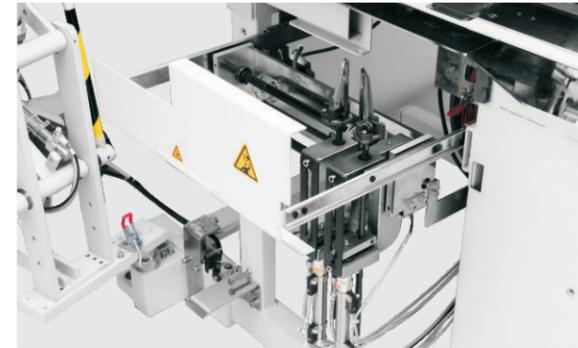


4 New Corner Knife, Exactly Fabric Cutting

Drawer system design corner knife can be adjusted directly once pulled out. Elongated knife head prevent conflict with fabric, improve the accuracy of cutting.

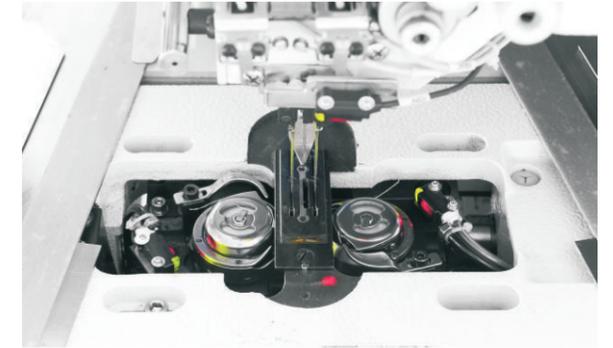


5 Bobbin Thread Shortage Alarm

Bobbin thread sensor monitoring the thread margin, send report automatically before the bottom line exhausted, therefore the operator can replace the bobbin thread in time, ensure 100% stitches.

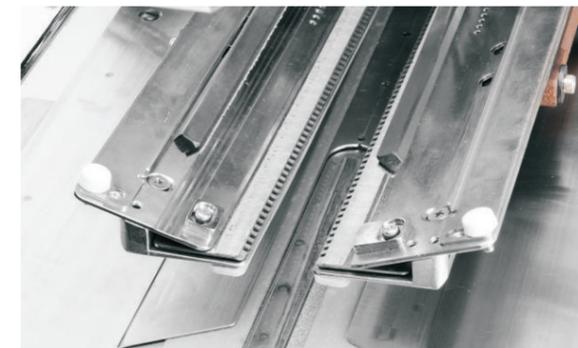

6 Triple feeding, Good Positioning

To ensure that the feeding of upper and lower fabric no mutual friction, so the fabric will not split.

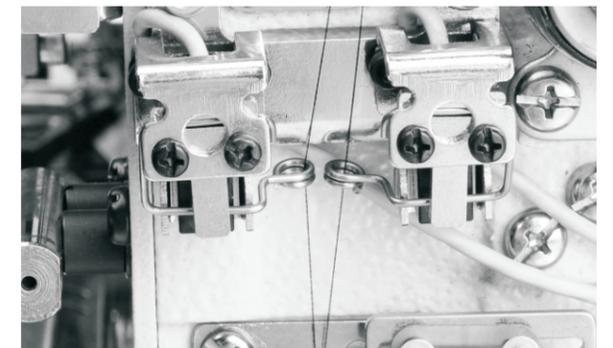

7 Automatically Stop, No Wastage

With the thread breaking sensor, machine will stop immediately in case thread breaking during sewing, do not damage fabric.

Technical Parameter

JK-T5878-68	MTX190 14-18# (Standard 16#)	2	3	8-20	18-220	3000	1200x1600x1500	240/350	
JK-T5878-78	DPX17 14-18# (Standard 16#)	2	3	8-20	18-220	3000	1200x1600x1500	240/350	