

14 years
World No.1*



Jack Facebook



Jack YouTube



Jack WeChat

400-8876-858
cn.chinajack.com

JACK TECHNOLOGY CO.,LTD

ADD:No.1008, Donghai Avenue East, Jiao jiang District,
Taizhou City, Zhejiang Province, China
TEL:0086-576-88177782.

*Source: Frost & Sullivan's research based on the number of industrial sewing machines sold by major global industrial sewing machine companies in each year between 2010 and 2023, market research completed in September 2024.

14 years
World No.1*

JACK

W5E

Stepping flatbed high
speed computerized
interlock sewing machine

High efficiency and stability/one machine multi-function

- Auto trimming, Save manpower and threads
- sew thin and thick, beautiful stitch
- Step drive, stable and silent
- one machine multi-purpose



W5E



Stepping motor



Trimming mechanism

1 Trimming accurate, long life, light sound


The sound of the machine is reduced by at least 6 decibels, no noise, no noise; Double the strength of trimming cutting and lifting press foot, accurate trimming cutting, no failure; Longer service life; Completely eliminates the issues of traditional electromagnetic decay and weakness



2 Auto trimming, Save manpower and stitches

The comprehensive production capacity is increased by 10%

The short threads ends can save 324 kilometers of thread per year and eliminate the separate thread-cutting process

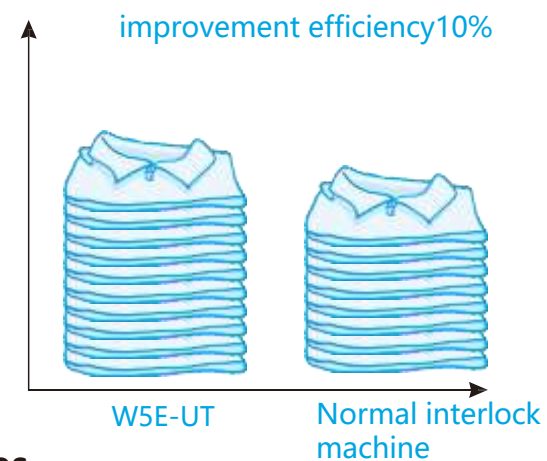

Strong ability to cross thick
Presser lift height from 5mm to 7mm



cross stem
Smoothly

fabric does
not arch

3 Sew thin and thick, beautiful stitch

Expand the range of sewing, mesh, thick underwear and other knitted fabrics can be applied




Roll collar sewing



Cover sewing



Hem sewing

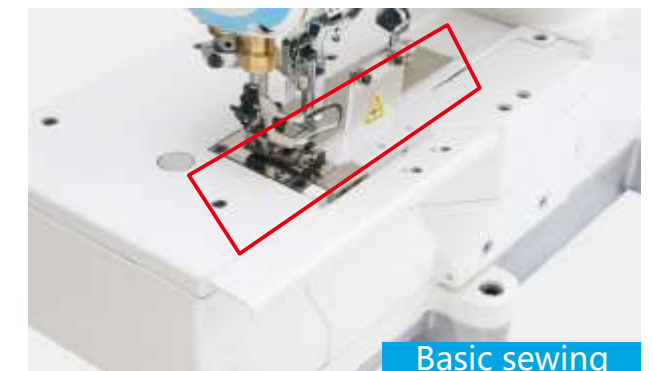

Basic sewing

4 one machine multi-purpose

One machine multi-purpose, fast switching: 01GB, 02BB, 03DB, 08AC four models of sewing table universal, four models can be simple and fast switching, no need to buy new sewing table accessories

Technical specification

Model	Apply	Needle	Needle NO.	Thread NO.	needle gauge (mm)	Stitch width (mm)	Differential ratio	Presser lift height (mm)	Max speed (S.p.m)	Volume (mm)	Weight (kg)
W5E-UT2-01GB	Basic sewing	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W5E-UT2-02BB	Roll collar sewing	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	6	5500	670×445×595	54/64
W5E-UT2-03DB	Cover sewing	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W5E-UT2-08AC	Hem sewing	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64

Note:

1, UT2 stands for computer; Not standard with scissors line;

2, the computer can be selected UT, with the standard wire cutter.